


Inductive ring sensor

RC10-14-N3-Y187454

- 10 mm inside diameter
- Comfort series
- Bistable
- Direction detection



Dimensions

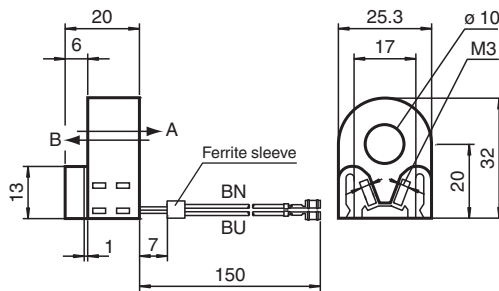

Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		NAMUR, bistable
Inside diameter		10 mm
Measuring cone		4 mm, 1.4401
Passage speed	v	≤ 10 m/s
Output type		2-wire
Nominal ratings		
Nominal voltage	U _o	8.2 V (R _i approx. 1 kΩ)
Operating voltage	U _B	5 ... 25 V
Hysteresis	H	typ. 1 %
Reverse polarity protection		reverse polarity protected
Current consumption		
Passage B U _B =8V		≥ 3 mA
Passage B U _B =10V		≥ 4.2 mA
Passage A U _B =10V		0.5 ... 1 mA typ. 0.9 mA
Passage A U _B =8V		0.5 ... 0.95 mA typ. 0.8 mA
Power ON		≥ 3 mA with U _B = 8 V ≥ 4.2 mA at U _B = 10
Time delay before availability	t _v	≤ 5 ms
Functional safety related parameters		
MTTF _d		2130 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		

Release date: 2023-01-27 Date of issue: 2023-01-27 Filename: 187454_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

NAMUR	EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
Approvals and certificates	
ATEX approval	
Equipment protection level Gb	PTB 99 ATEX 2128 X
UL approval	cULus Listed, General Purpose
CSA approval	cCSAus Listed, General Purpose
Ambient conditions	
Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)
Storage temperature	-40 ... 100 °C (-40 ... 212 °F)
Mechanical specifications	
Connection type	cablc PVC , 150 mm Crimp terminal sockets 60888-3, AMP
Core cross section	0.14 mm ²
Housing material	PBT
Degree of protection	IP67
Mass	20 g
General information	
Use in the hazardous area	see instruction manuals

Connection

