


Inductive sensor


NJ15-30GM-N-10M



- Comfort series
- 15 mm non-flush
- Usable up to SIL 2 acc. to IEC 61508

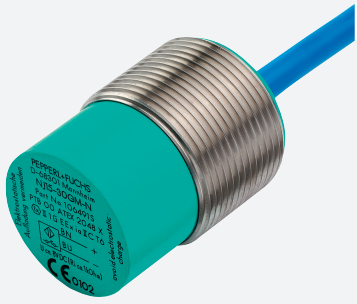

Dimensions



Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	s_n	15 mm
Installation		non-flush
Assured operating distance	s_a	0 ... 12.15 mm
Reduction factor r_{AI}		0.4
Reduction factor r_{Cu}		0.3
Reduction factor r_{304}		0.85
Output type		2-wire
Nominal ratings		
Nominal voltage	U_o	8.2 V (R_i approx. 1 k Ω)
Switching frequency	f	0 ... 100 Hz
Current consumption		
Measuring plate not detected		min. 3 mA
Measuring plate detected		\leq 1 mA
Functional safety related parameters		

Release date: 2023-01-27 Date of issue: 2023-01-27 Filename: 70133322_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

Safety Integrity Level (SIL)	SIL 2	
MTTF _d	4560 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	0 %	
Compliance with standards and directives		
Standard conformity		
NAMUR	EN 60947-5-6:2000 IEC 60947-5-6:1999	
Standards	EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012	
Approvals and certificates		
IECEX approval		
Equipment protection level Ga	IECEX PTB 11.0037X	
Equipment protection level Gb	IECEX PTB 11.0037X	
Equipment protection level Da	IECEX PTB 11.0037X	
Equipment protection level Mb	IECEX PTB 11.0037X	
ATEX approval		
Equipment protection level Ga	PTB 00 ATEX 2048 X	
Equipment protection level Gb	PTB 00 ATEX 2048 X	
Equipment protection level Da	PTB 00 ATEX 2048 X	
UL approval		
Ordinary Location	E87056	
Hazardous Location	E501628	
Control drawing	116-0452	
CCC approval		
Hazardous Location	2020322315002255	
NEPSI approval		
NEPSI certificate	GYJ16.1393X	
ANZEx	18.3018X	
Ambient conditions		
Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)	
Mechanical specifications		
Connection type	cable	
Housing material	Stainless steel 1.4305 / AISI 303	
Sensing face	PBT	
Degree of protection	IP67	
Cable		
Cable diameter	6 mm ± 0.2 mm	
Bending radius	> 10 x cable diameter	
Material	PVC	
Core cross section	0.75 mm ²	
Length	L	10 m
General information		
Use in the hazardous area	see instruction manuals	

Release date: 2023-01-27 Date of issue: 2023-01-27 Filename: 70133322_eng.pdf

Connection



Accessories

	BF 30	Mounting flange, 30 mm
--	--------------	------------------------

Release date: 2023-01-27 Date of issue: 2023-01-27 Filename: 70133322_eng.pdf