


# Inductive sensor

## NJ1,5-8-N-Y18812

■ With special adjustment



### Dimensions



### Technical Data

#### General specifications

Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	$s_n$	1.5 mm
Installation		flush
Assured operating distance	$s_a$	0 ... 0.97 mm
Reduction factor $r_{Al}$		0.4
Reduction factor $r_{Cu}$		0.3
Reduction factor $r_{304}$		0.85
Output type		2-wire

#### Nominal ratings

Nominal voltage	$U_o$	8 V
Switching frequency	$f$	0 ... 2000 Hz
Hysteresis	$H$	0.1 mm
Current consumption		
Measuring plate not detected		min. 2.5 mA
Measuring plate detected		$\leq 1.2$ mA

#### Functional safety related parameters

MTTF <sub>d</sub>		11467 a
Mission Time (T <sub>M</sub> )		20 a
Diagnostic Coverage (DC)		0 %

Release date: 2023-01-26 Date of issue: 2023-01-26 Filename: 70133345\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS



## Technical Data

Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
Approvals and certificates		
IECEX approval		
Equipment protection level Gb		IECEX PTB 11.0037X
Equipment protection level Da		IECEX PTB 11.0037X
Equipment protection level Mb		IECEX PTB 11.0037X
ATEX approval		
Equipment protection level Gb		PTB 00 ATEX 2048 X
Equipment protection level Da		PTB 00 ATEX 2048 X
UL approval		
		cULus Listed, General Purpose
CCC approval		
Hazardous Location		2020322315002258
NEPSI approval		
NEPSI certificate		GYJ16.1393X
ANZEx		18.3018X
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cable
Housing material		brass
Sensing face		PBT
Degree of protection		IP67
Cable		
Cable diameter		3.5 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Material		PUR
Core cross section		0.14 mm <sup>2</sup>
Length	L	6 m
General information		
Use in the hazardous area		see instruction manuals

## Connection



# Mounting

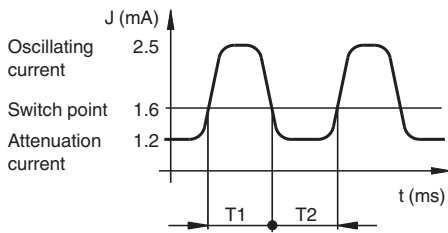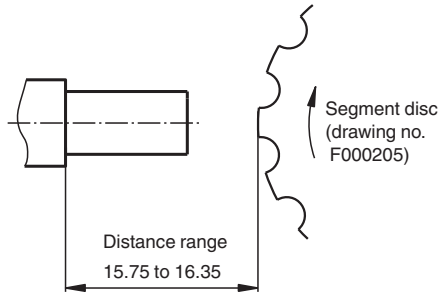

$T_1 : T_2 = 1 : 5$  to  $5 : 1$

Release date: 2023-01-26 Date of issue: 2023-01-26 Filename: 70133345\_eng.pdf