

# Inductive sensor


## NBB10-30GK60-AR-180MM-6DT06



- Relay output
- Operating distance 10 mm
- SPDT output
- Switch load currents to 6 Amps
- Pigtail w/Deutsch QD



### Dimensions

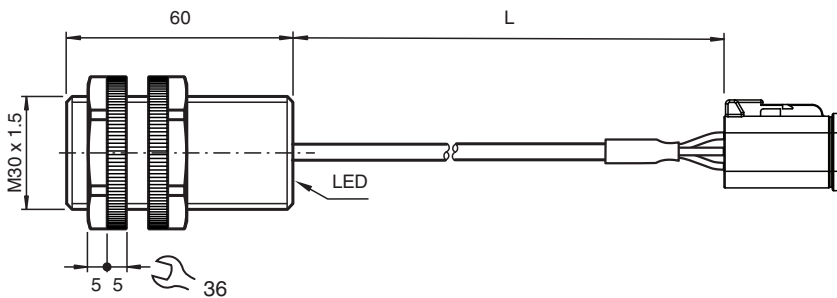

### Technical Data

General specifications		
Switching function		change-over contact
Output type		relay
Rated operating distance	$S_n$	10 mm
Installation		flush
Output polarity		DC
Reduction factor $r_{AI}$		0.4
Reduction factor $r_{Cu}$		0.3
Reduction factor $r_{304}$		0.85
Output type		Relay output
Mechanical life		No load: $2 \times 10^7$ operations Full load: $1 \times 10^5$ switching cycles
Nominal ratings		
Operating voltage	$U_B$	10 ... 30 V DC
Switching frequency	f	20 Hz
Hysteresis	H	approx. 10 %
Reverse polarity protection		yes

Release date: 2022-06-20 Date of issue: 2022-06-20 Filename: 70146727\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

## Technical Data

Short-circuit protection		no
Operating current	$I_L$	$\leq 50 \text{ mA}$
Switching state indicator		LED, yellow
<b>Output</b>		
Switching voltage		max 28 V DC
Switching current		max 6 A DC resistive load
Switching power		max 180 W
<b>Compliance with standards and directives</b>		
Standard conformity		
Standards		EN 60947-5-2:2007 IEC 60947-5-2:2007
<b>Ambient conditions</b>		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
<b>Mechanical specifications</b>		
Connection type		fixed cable with plug
Core cross section		0.75 mm <sup>2</sup>
Housing material		PBT
Sensing face		PBT
Degree of protection		IP68
Connector		
Connection assembly		Connector: DT06-6S-C015 Terminal: 1062-16-0622 Wedge Lock: W6S Connector Plug: 114017 Protective Loom: 911365
Cable		
Length	L	L = 170 m

## Connection Assignment

