


# Magnetic Actuation


## 41FY2



- Magnet Actuator
- Compatible with 40FY Series

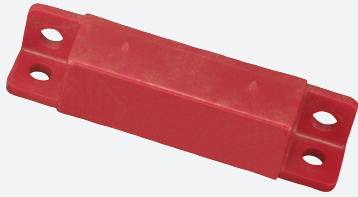

### Dimensions

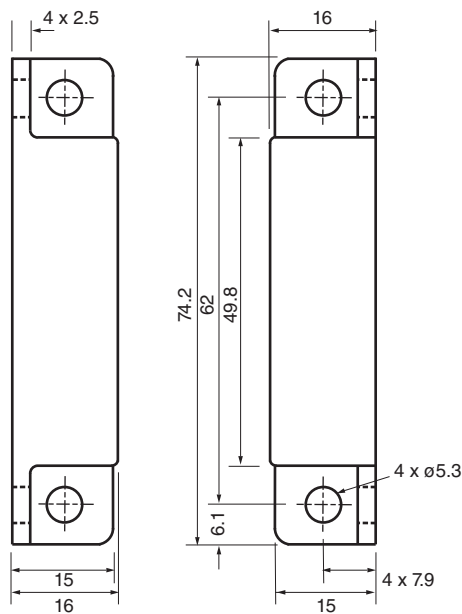

### Technical Data

<b>General specifications</b>		
Rated operating distance	$S_n$	8 ... 19 mm
<b>Nominal ratings</b>		
Switching state indicator		NO contact
<b>Standard conformity</b>		
Standards		EN 60947-5-2
<b>Approvals and certificates</b>		
UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose
<b>Ambient conditions</b>		
Ambient temperature		-30 ... 70 °C (-22 ... 158 °F)

Release date: 2022-05-23 Date of issue: 2022-05-23 Filename: 450047\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

**Technical Data****Mechanical specifications**

Housing material	Polycarbonate
Sensing face	Polycarbonate
Degree of protection	IP67

Release date: 2022-05-23 Date of issue: 2022-05-23 Filename: 450047\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.comUSA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com **PEPPERL+FUCHS**