


Activator BT32XAS

- Two fixed operating surfaces offset by 180°
- Action reversed (end position undamped)
- Finger protection

Activator for F25 series

Dimensions

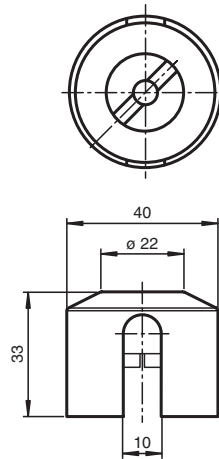

Technical Data

General specifications

| | |
|--------------------|------------|
| Ring diameter | max. 40 mm |
| Spring ring height | max. 6 mm |

Ambient conditions

| | |
|---------------------|--------------------------------|
| Ambient temperature | -25 ... 70 °C (-13 ... 158 °F) |
|---------------------|--------------------------------|

Mechanical specifications

| | |
|-------------------------------------|-----------------------------------|
| Shaft diameter | < 31 mm |
| Shaft height | 20 mm |
| Mounting hole pattern | 30 x 80 mm |
| Material | |
| Housing | 1.4057 |
| Stopper cap | PBT (1 unit black) |
| Mounting screw | Stainless steel 1.4305 / AISI 303 |
| Mass | 200 g |
| Tightening torque, fastening screws | 1.5 Nm |

Release date: 2021-04-01 Date of issue: 2021-04-01 Filename: 212364_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS