

# Inductive sensor


## NRB2-8GH40-E2-V1



- 2 mm flush
- Reduction factor = 1
- Magnetic field resistant
- Stainless steel housing
- Front face FDA conform



### Dimensions

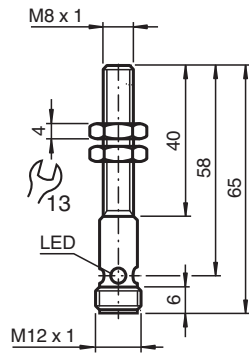

### Technical Data

| General specifications      |       |                            |
|-----------------------------|-------|----------------------------|
| Switching function          |       | Normally open (NO)         |
| Output type                 |       | PNP                        |
| Rated operating distance    | $s_n$ | 2 mm                       |
| Installation                |       | flush                      |
| Output polarity             |       | DC                         |
| Assured operating distance  | $s_a$ | 0 ... 1.62 mm              |
| Reduction factor $r_{Al}$   |       | 1                          |
| Reduction factor $r_{Cu}$   |       | 1                          |
| Reduction factor $r_{304}$  |       | 1                          |
| Reduction factor $r_{S137}$ |       | 1                          |
| Output type                 |       | 3-wire                     |
| Nominal ratings             |       |                            |
| Operating voltage           | $U_B$ | 10 ... 30 V DC             |
| Switching frequency         | $f$   | 0 ... 4000 Hz              |
| Hysteresis                  | $H$   | typ. 5 %                   |
| Reverse polarity protection |       | reverse polarity protected |

Release date: 2022-05-23 Date of issue: 2022-05-23 Filename: 233614\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com



Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

## Technical Data

|   |       |  |
|---|-------|--|
| Short-circuit protection                        |       | pulsing  |
| Voltage drop                                    | $U_d$ | $\leq 2.5$ V   |
| Operating current                               | $I_L$ | 0 ... 200 mA   |
| Off-state current                               | $I_r$ | 0 ... 0.5 mA typ. 0.1 $\mu$ A at 25 °C                             |
| No-load supply current                          | $I_0$ | $\leq 15$ mA   |
| Constant magnetic field                         | B     | 200 mT   |
| Alternating magnetic field                      | B     | 200 mT   |
| Switching state indicator                       |       | Multihole-LED, yellow  |
| <b>Functional safety related parameters</b>     |       |  |
| MTTF <sub>d</sub>                               |       | 1010.5 a   |
| Mission Time (T <sub>M</sub> )                  |       | 20 a   |
| Diagnostic Coverage (DC)                        |       | 0 %  |
| <b>Compliance with standards and directives</b> |       |  |
| Standard conformity                             |       |  |
| Standards                                       |       | EN 60947-5-2:2007<br>IEC 60947-5-2:2007                            |
| <b>Approvals and certificates</b>               |       |  |
| UL approval                                     |       | cULus Listed, General Purpose, Class 2 Power Source                |
| CCC approval                                    |       | CCC approval / marking not required for products rated $\leq 36$ V |
| <b>Ambient conditions</b>                       |       |  |
| Ambient temperature                             |       | -25 ... 85 °C (-13 ... 185 °F)                                     |
| Storage temperature                             |       | -40 ... 100 °C (-40 ... 212 °F)                                    |
| <b>Mechanical specifications</b>                |       |  |
| Connection type                                 |       | Connector plug M12 x 1 , 3-pin                                     |
| Housing material                                |       | Stainless steel 1.4404 / AISI 316L                                 |
| Sensing face                                    |       | LCP, (conforms with FDA)   |
| Degree of protection                            |       | IP67   |

## Connection



Wire colors in accordance with EN 60947-5-2

|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |